


- > **Port size: 1/4"**  
(ISO G or NPT)
- > **Reliable, rugged, open loop control**
- > **Proportional I/P and E/P converters**
- > **Minimum vibration effects**
- > **IP65 environmental protection**
- > **Mounting bracket and connector included**



### Technical features

#### Medium:

Oil free, dry air, filtered to 5 µm

#### Output Pressure:

0,2 ... 1 bar (2,9 ... 14 psi)

0,2 ... 2 bar (2,9 ... 29 psi)

0,2 ... 4 bar (2,9 ... 58 psi)

0,2 ... 8 bar (2,9 ... 116 psi)

See ordering options

#### Supply pressure:

At least 0,7 bar (10 psi) above max. required output pressure.

up to 2 bar (29 psi) instruments:

max 5 bar (72 psi)

up to 8 bar (116 psi) instruments:

max 10 bar (145 psi)

#### Flow capacity:

> 300NI/min forward & relief flow

#### Air consumption:

up to 1 bar (15 psi): 2,8 NI/min

up to 2 bar (29 psi): 4,0 NI/min

up to 4 bar (58 psi): 7,5 NI/min

up to 8 bar (116 psi): 9,0 NI/min

#### Linearity:

≤ 0,5% of span

#### Hysteresis:

≤ 0,5% of span

#### Response Time:

<0,35 seconds for 10 ... 90% or

90 ... 10% of output pressure into a 10cc load (1 bar range instruments)

#### Temperature Sensitivity:

< 0,1% of span/°C between

-40 ... +85°C (-40 ... 185°F)

#### Supply sensitivity:

<0,075% span output change per % supply pressure change

#### Port sizes:

Main ports:

G1/4 or 1/4 NPT

Integral gauge ports:

G1/4 or 1/4 NPT

#### Ambient/Media temperatur:

-40 ... +85°C (-40 ... 185°F)

Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F)

#### I.P. Rating:

IP65 in normal operation

#### Weight:

1,0 kg

#### Mounting Position:

Surface mounting bracket provided.

Alternative mounting options available.

#### Vibration Effect:

5% of span: 4mm-p 5 ... 15Hz and 2g sine 15 ... 150Hz.

#### Materials:

Body: Passivated zinc die-casting, epoxy painted

Cover: Glass reinforced PA

Diaphragms: NBR

### Electrical parameters

<b>Input Signal</b>	mA versions 1 ... 4 bar: 2 wire 4 ... 20 mA; 3 wire 4 ... 20 mA +12 ... 24 V mA versions 6 ... 8 bar: 3 wire 4 ... 20 mA +12 ... 24 V voltage versions 1 ... 4 bar: 2 wire 0 ... 10 V; 3 wire 0 ... 10 V +12 ... 24 V voltage versions 6 ... 8 bar: 3 wire 0 ... 10 V +12 ... 24 V
<b>Failure Mode</b>	Output pressure falls to zero signal state when electrical supply fails
<b>Connections</b>	30 mm square connector provided (DIN 43650, form A) mountable in four orientations
<b>Span/Zero</b>	Adjustable up to 20 % output range - further information available

### Option selector

**VP10★★★★★0★A00**


Pressure range	Substitute	Power supply	Substitute
0,2 ... 1 bar / 3 ... 15 psi	<b>01</b>	None required	<b>0</b>
0,2 ... 2 bar / 3 ... 30 psi	<b>02</b>	12 / 24 V (Required for 6 & 8 bar units)	<b>1</b>
0,2 ... 4 bar / 3 ... 60 psi	<b>04</b>		
0,2 ... 6 bar / 3 ... 90 psi	<b>06</b>		
0,2 ... 8 bar / 3 ... 120 psi	<b>08</b>		
Unit of Measure	Substitute	Input signal	Substitute
bar	<b>B</b>	0 ... 10 V / 1 ... 10 V	<b>1</b>
psi	<b>P</b>	4 ... 20 mA	<b>4</b>
		Port size	Substitute
		1/4 NPT	<b>K</b>
		1/4 BSP	<b>J</b>

#### Other options available:

- Alternative input signal ranges
- Conduit entry with flying leads
- 50 mm pipe mounting bracket
- Alternative pressure ranges
- Junction box (M20 / 1/2" NPT)
- Captured exhaust
- Flying Leads
- Intrinsically safe certification
- Reverse acting
- Split range

## Dimensions

Dimensions in mm  
Projection/First angle

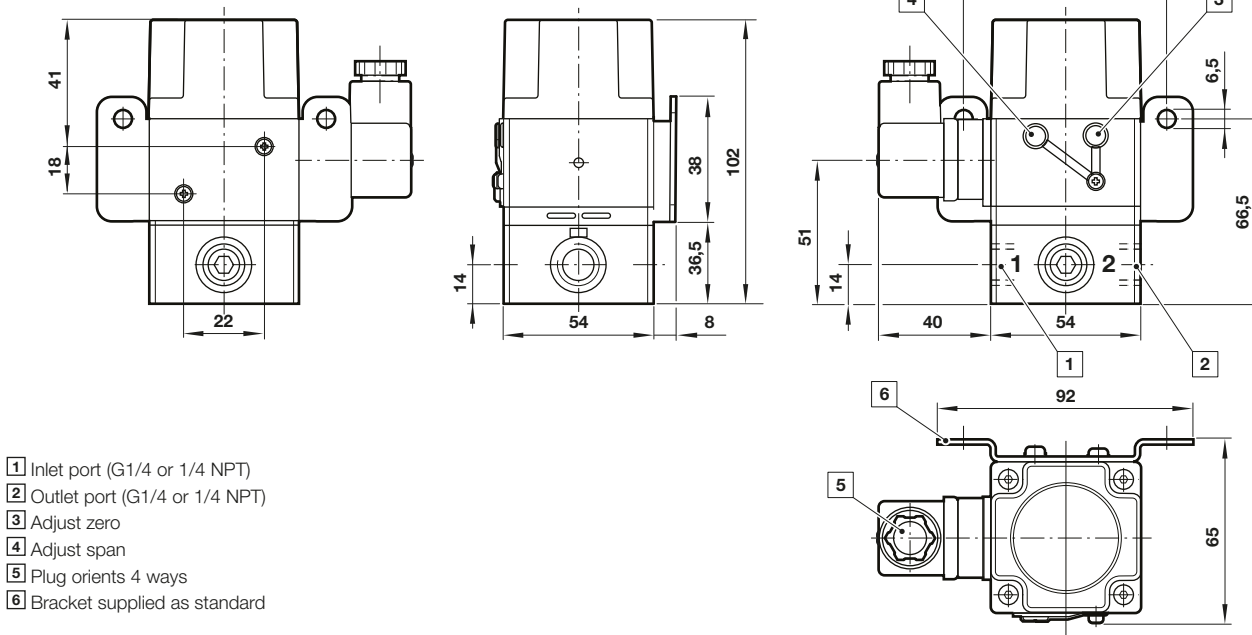

- 1 Inlet port (G1/4 or 1/4 NPT)
- 2 Outlet port (G1/4 or 1/4 NPT)
- 3 Adjust zero
- 4 Adjust span
- 5 Plug orients 4 ways
- 6 Bracket supplied as standard

## Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under

### »Technical features/data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren GmbH.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.